



MISS

Sistema di anta costituita da un pannello tamburato realizzato da un telaio in abete con all'interno l'alveolo pressato con pannello fronte-retro in mdf.

Anta battente

È composta da un pannello tamburato da 42 mm di spessore, che viene fornito con serratura magnetica in doppia versione, a spingere o a tirare. Sono incluse la serratura magnetica e le cerniere a scomparsa regolabili sui 3 assi. Le maniglie e i sistemi di chiusura non sono inclusi e sono da abbinare a parte.

Anta a scomparsa

È realizzata con un pannello tamburato da 42 mm di spessore con predisposizione aggancio binario-controtelaio. È dotata di maniglia a incasso MV, nella stessa finitura del pannello. A richiesta è disponibile il sistema di chiusura antipanico "libero-occupato".

Anta scorrevole

Sempre composta da pannello tamburato da 42 mm di spessore, è predisposta per l'aggancio al binario nelle tre versioni: a parete, a soffitto e incasso. È completa di maniglia a incasso MV, nella stessa finitura del pannello.

Anta per sistema pivot

È composta da un pannello tamburato da 42 mm. È dotata di sistema pivotante idraulico con fermo a 0°-90°-180°. La posizione della cerniera ha il fulcro a min. 83 mm e max 200 mm. Consente l'abbinamento con porte di portata: 100, 200, 500 kg. È completa di maniglia a incasso MV, nella stessa finitura del pannello.

Door system consisting of a honeycomb panel made from a fir frame with a pressed honeycomb inside with a front-back mdf panel.

Swing door

It is made of a 42 mm thick honeycomb panel, which is supplied with a magnetic lock in two versions, push or pull. The magnetic lock and the concealed hinges adjustable on 3 axes are included. The handles and locking systems are not included and must be combined separately.

Pocket door

It is made with a 42 mm thick honeycomb panel with provision for track-counterframe hooking. It is equipped with a MV recessed handle, in the same finish as the panel. The "free-busy" anti-panic closing system is available on request.

Sliding door

Always composed of a 42 mm thick honeycomb panel, it is designed for attachment to the track in three versions: wall, ceiling and built-in. It is complete with a built-in MV handle, in the same finish as the panel.

Pivot door




It is made of a 42 mm honeycomb panel. It is equipped with a hydraulic pivot system with a stop at 0°-90°-180°. The hinge position has a fulcrum at min. 83 mm and max 200 mm. It allows combination with doors with a capacity of: 100, 200, 500 kg. It is complete with a MV recessed handle, in the same finish as the panel.

ABBINAMENTI CON STIPITI, MECCANISMI E BINARI (da pag 119 a pag 133)
MATCHING WITH JAMBS, MECHANISMS AND RAILS (from pag 119 to pag 133)




BATTENTE / SWING DOOR	SCORREVOLE A SCOMPARSA / POCKET DOOR	SCORREVOLE / SLIDING DOOR
Filo Muro	Filo Muro (tipologia Essential® o Syntesis Line®)	Binari / Rails
Stipite Arc / Arc door jamb	Stipite Arc / Arc door jamb	

DIMENSIONI ANTE
DOORS DIMENSIONS

BATTENTE / SWING



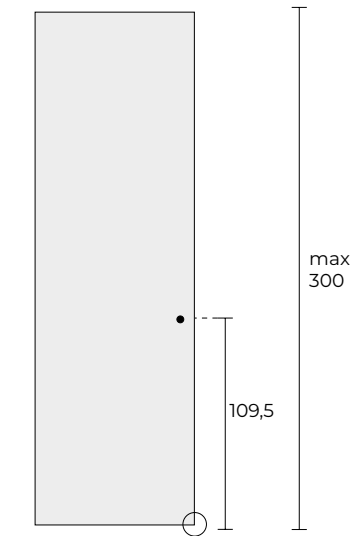


A SCOMPARSA / POCKET DOOR

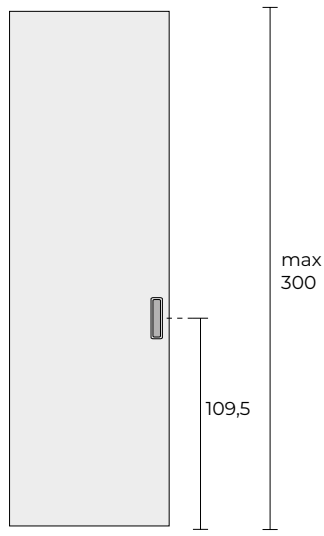

maniglia incassata
inset handle

SCORREVOLE / SLIDING DOOR

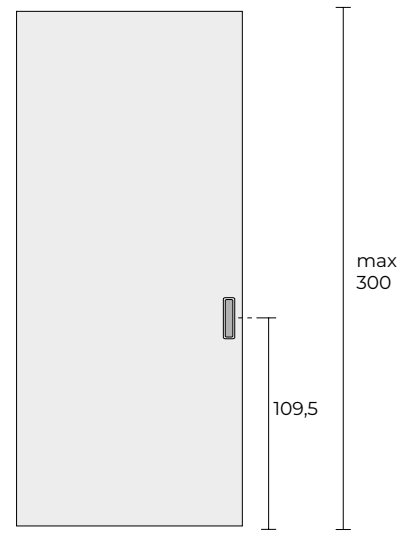

blocco di chiusura
locking system

LACCATI OPACHI / MATT LACQUERED



Neve



Corda



Fango



Tabacco



Caffè



Grigio



Antracite



Nero

LACCATI SPECIALI / SPECIAL LACQUERED



Bronzo



Piombo



Titanio



Oro

LEGNI / WOOD



Canaletto



Rovere



Rovere Grigio



Rovere TT

LEGNI SPECIALI / SPECIAL WOOD



Sand



Lava

* Disponibili su richiesta / Available on request.